

PHON-X[®]

Directional loudspeaker

NGS-1



The NGS-1 directional Loudspeaker is an excellent tool, robust and easily transportable capable of producing a high sound pressure. For this reason and for its outstanding qualities of directivity and power is particularly suitable for sound insulation measures, time of reverberation etc ...

Ideal to be connected amplifier system AMPLI 12 PLUS as an alternative to do-decahedron OMNI 12 series.


NGS-1 can however also be used with other external sources amplified in accordance with the acoustic requirements of the system.

TECHNICAL SPECIFICATIONS

Frequency response: 75 Hz - 20 kHz \pm 3 dB
 limit low frequency -3 dB 65 Hz
 limit low frequency: -6 dB 49 Hz
 Sensitivity: 1 W @ 1 m: 95 dB SPL
 Maximum output:
 Continuous: 114 dB SPL; peak: 119 dB SPL
 Nominal Impedance: 4 Ω
 Power handling:
 aes: 250 W; continuous: 155 W RMS
 Nominal coverage angle (-6 dB):
 Conical. waveguide

LF / MF speaker: 1 x 8 inches
 HF speaker: 1 x 1-inch horn tweeter
 Crossover: Passive 6/12 slope 3K5 Hz
 Connectors: 2 x Speakon 4-pole
 Material: Finnish birch plywood 15 mm
 Finish: polyurethane paint scratchproof

DIMENSIONS:
 Height: 43.0 cm
 Length: 25.0 cm
 width: 25.0 cm
 Weight: 9,5kg

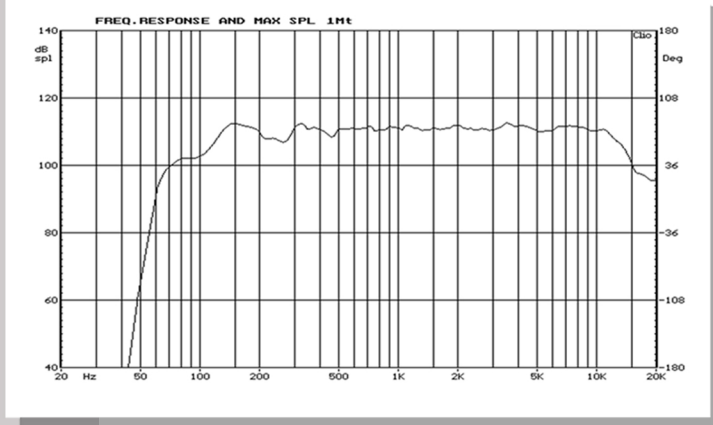

nylon bag (optional)

DISTRIBUTED BY



Via Guardia Del Consiglio, 6/b 6/a zona industriale Galazzano 47899, Serravalle R.S.M
 tel: +378 0549/955568 e-mail: support@phon-x.com site: www.phon-x.com

*New support "x-rigging" (optional)
 It allows you to adjust the angle of the speaker on the floor.*